




DC Power Supply

# GP-4303DU/TP 사용자 설명서

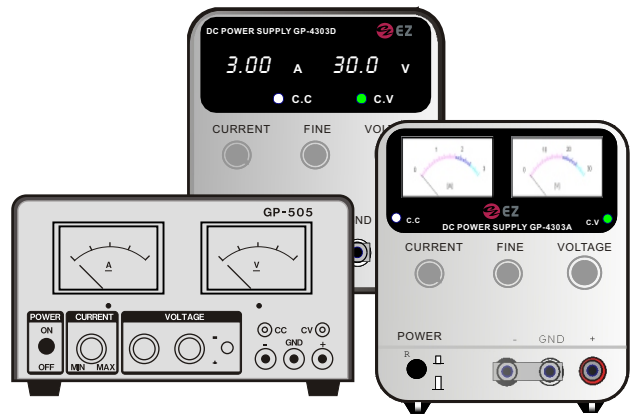

 이지디지털주식회사

( )

( )

[ ]

:

가

가



230V

[ ]

:

:

:



GROUND

[       ]

1.

: 5 ~ +40  
: 80% ~ 50%  
: 0 ~ +70  
: 85%

2.

3.

가                    (   )                    .

[       ]

1

1

1



1.	.....	1
2.	.....	2
2-1		
2-2	.....	3
3.	.....	4
3-1.		
3-2.		
4.	.....	5
4-1.		
4-2.		
5.	.....	6
5-1.		
5-1-1		
5-1-2		
5-2.	.....	7
5-2-1		
5-2-2	.....	8
5-2-3		
5-2-4	.....	9

1.

2 (GP-4303DU) 3 (GP-4303TP)

- 1. GP-4303TP 0~30V,0~3A 가 2  
5V/2A 가
- 2. 0~60V,0~3A 가 2
- 3. 0~30V,0~6A 가 2
- 4. 0 ~ +30V,0 ~ -30V 가 0~3A

3 5V/2A 30V,3A 2  
가 가

(CV) (CC) 2


AC115V / 230V



230V

2.

2-1. FUSE

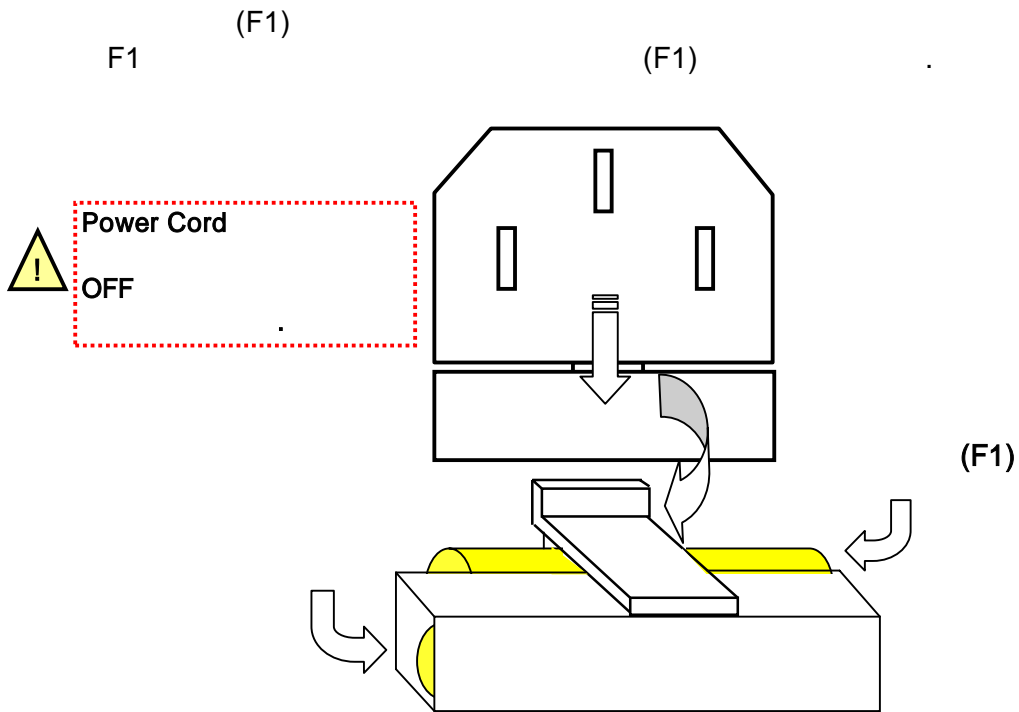

			(250V)	
			1303DU/TP	1305/1503DU/TP
AC 90 ~ 132	115	F1	T4.0L	T6.3L
AC 198 ~ 250	230	F1	T1.6L	T2.5L



!

2-2



가

1.

2.

( 가 )  
20 ~30

3.

4.

가

5.

가

6.

7.

8.

9.

10.

11.

12.

가

13.

가

3.

3-1

GP-4303DU

	1CH	0 ~ 30V	0~3A	
	2CH			
	1CH	0 ~ 60V	0~3A	
	1CH	0 ~ 30V	0~6A	
	1CH	0 ~ +30V	0~3A	
	2CH	0 ~ -30V		

GP-4303TP

5V/2A

가 가 .

3-2

GP-4303DU:0 ~ ±30V / 0~3A GP-4303TP:0 ~ ±30V / 0~3A (5V/2A )

0.5mVrms

0.01% +2mV ( ±10% )

0.1% +1mV ( 0 ~100% )

±(1% Reading + 1digit)

±(1% Reading + 1digit)

: 10MΩ (DC500V)

: 50MΩ (DC501V)

AC 115V / 230V , 50/60Hz

GP-4303DU : 250VA , GP-4303TP : 270VA

235(W) x 370(H) x 145(D)

(Kg)


11.5kg




4.

4-1

[ GP-4303DU ]

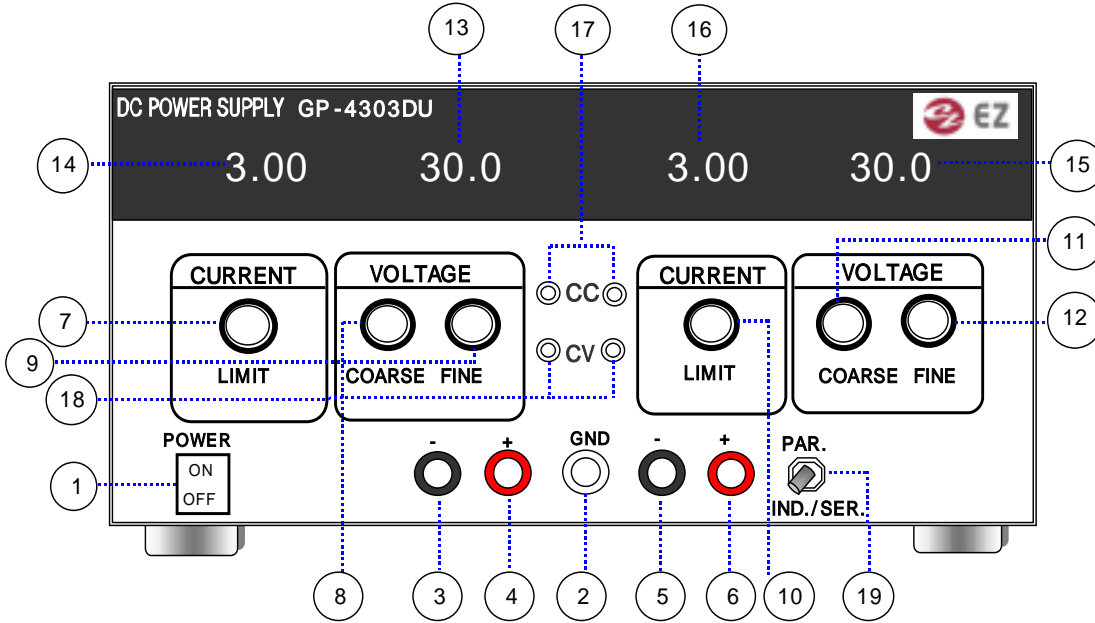

[ GP-4303TP ]

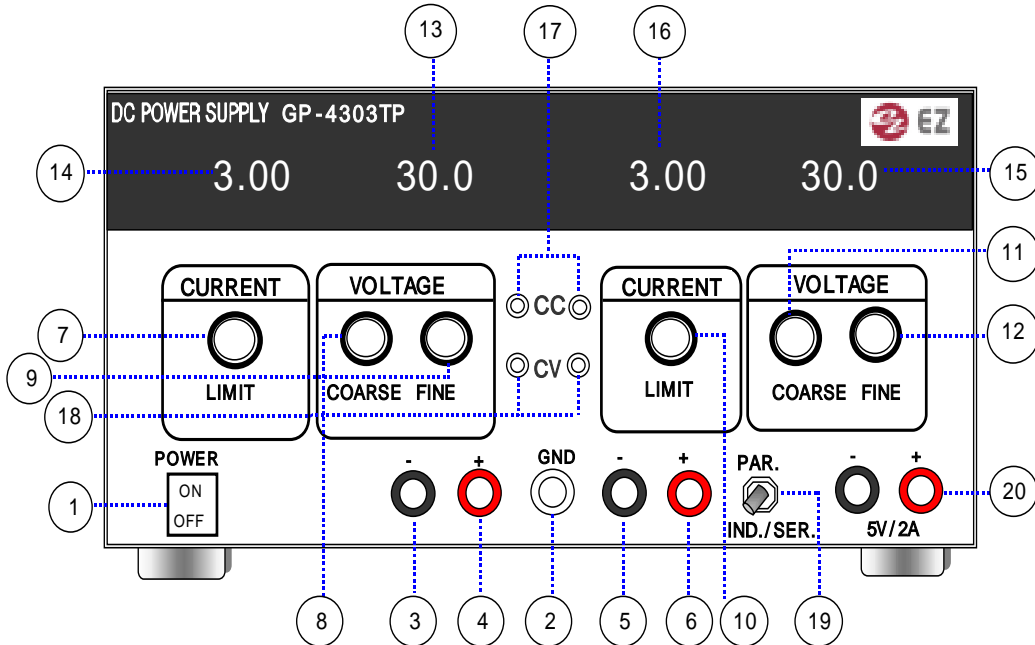

4-2

1.			
2. GND		Ground	
3. (-)	1	(-)	
4. (+)	1	(+)	
5. (-)	2	(-)	
6. (+)	2	(+)	
7.	1		
8. Coarse	1		
9. Fine	1		
10.	2		
11. Coarse	2		
12. Fine	2		
13.	1	(3digit)	
14.	1	(3digit)	
15.	2	(3digit)	
16.	2	(3digit)	
17. C.V			LED
18. C.C			LED
19.			
20.	5V/2A	(GP-4303TP	)

5.

5-1

5-1-1

5-1-2

- 1) AC 가
  - 2) OFF
  - 3)
  - 4) 1~3
  - 5) 1
  - 6) 가  
5~10V  
가 3A
  - 7) 2 5,6
  - 8) 3 (5V/2A) DMM
  - 9) 1 (+) 2 (-) 1 (-) 2 (+)
  - 10) 5V 1 (-) 2 (-)  
1(+) 2(+)
- 1,2 (3) (6)

## 5-2

### 5-2-1

1      2    0~3A , 0~30V    가가

1)

2) AC 115V / 230V

3)

4)

5)            AC

6)

7)

8)

9)

5V



:    1      2

5-2-2

1 2 2 , 60V

1) 5-2-1 1~2

2) 1 (+) (4) 2 (-) (5)

3) 5-2-1 3~6

4) 1 2

5) 1 (-) (3) 2 (+) (6)

6) 1 1 1 5V



5-2-3 ( )

1 2 +30V( ) -30V( )

1) 5-2-1 1~2

2) (GND) 1 (+) (4) 2 (-) (5)

3) 5-2-1 3~6

4) 1 0~-30V , 2 0~+30V

5) +,- 1 1 5V

2 2



5-2-4

가

5-2-1

1~7 9



C.C ( LED)가  
C.C ( LED)가



본 사용설명서는 사전 예고 없이 변경될 수 있습니다.